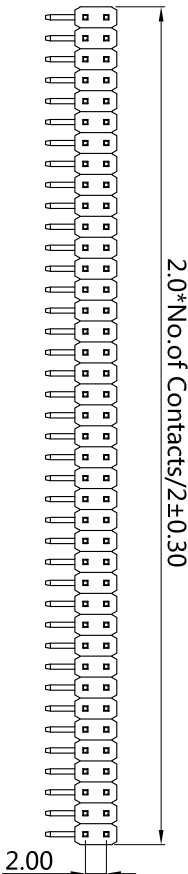
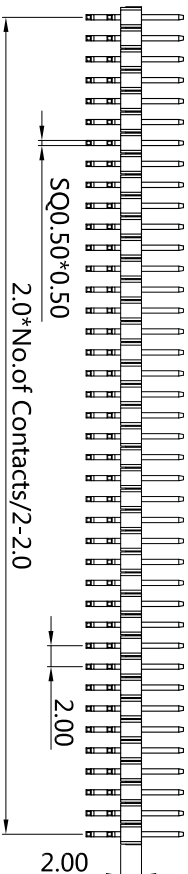
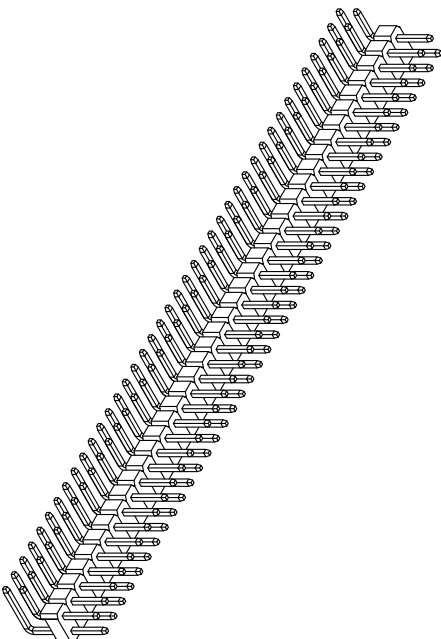
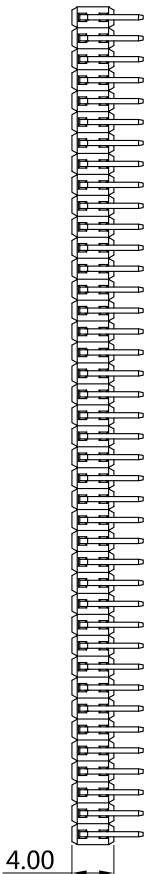


1	2	3	4	5	6	7	8
A	Current Rating: 2 Amps Insulator Resistance: 1000 Megohms min Dielectric Withstanding: AC 500V Contact Resistance: 20mΩ MAX Operation Temperature: -40~+105℃ Max processing temp: 230℃ for 60seconds Max processing temp: 260℃ for 10seconds Contact Material: Brass Insulator material: Standard: Polyester,UL 94V-0 Standard: PA6T Finish: Tin Gold Plated Standard: Gold Flash all over						
B							
C	 Dim.B 2.80 Dim.A 4.00 Dim.N 0.80 						
D	 Recommended P.C. Board SMD Layout						
E	(RoHS Compliant) H2 X 20 - 2 XX R0 BK X 000 X 1 2 3 4 5 6 7 1. Insulator material: 5. Contact Plated: N=PA6T T=Matte Tin over Nickel I= Gold 1μ" L=LCP P=PA9T W=Matte Tin over nickel 150μ" E=Gold 5μ" 2. Circuits:2-40 PIN Y=Bright Tin over Nickel G=Gold 10μ" 3. Tail Style: F= Gold Flash, Matte Tin 100μ" J=Gold 10μ" 4. Color: A=Gold 3μ" L= Gold 15μ" BK=Black B=Gold 3μ" M=Gold 15μ" U= Gold 30μ" D= Gold 5μ" V=Gold 30μ" Matte Tin 100μ" 6.Special Options 7. Packing: A=Bag B=Tube D=Small box E=Cap+Reel						
F	1: H2N20-140BKHOCL 2: SQ0.5-10 6/14.6-X-CL2 3: PART NO. H2X20-2XXR0BKX000X .X .XX .XXX DRAWING NO ZS-00109-P EDITION:A1 ITEM: H2 DRAWN BY Deng jin quan 2021-12-25 SCALE:1:1 APPROVAL BY Chen xiao guang 2021-12-27 UNIT:M.M 东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD TEL:0769-85350515 FAX:0769-85845060						