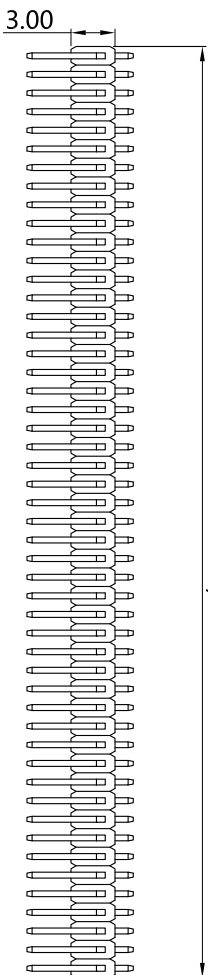
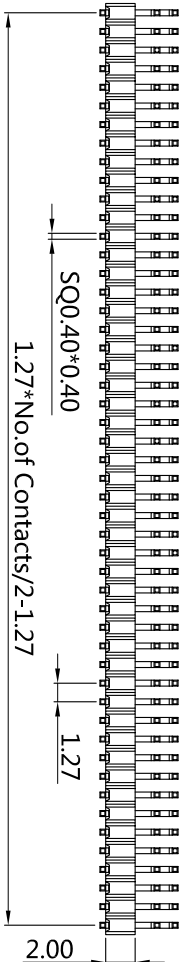

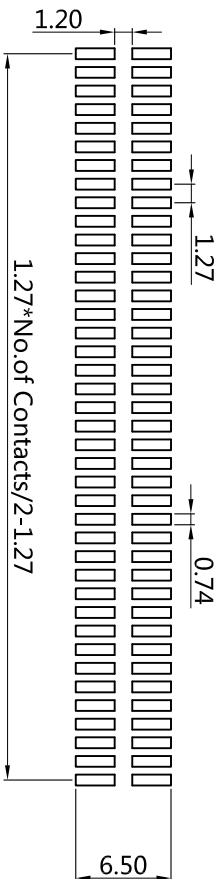
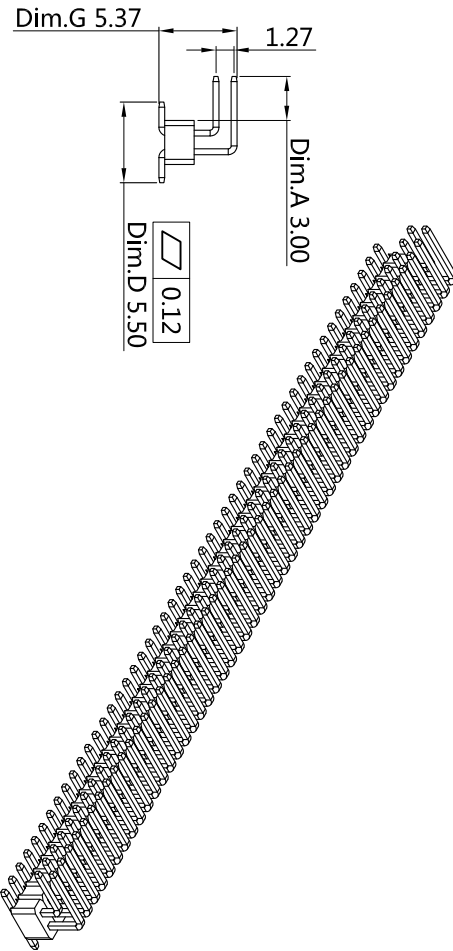


1	2	3	4	5	6	7	8																												
A																																			
B	1.27*No.of Contacts/2±0.30 																																		
C																																			
D																																			
E	(RoHS Compliant) H3 X 20 - 2 XX DR BK X 000 X 1 2 3 4 5 6 7 1. Insulator material: 5. Contact Plated: N=PA6T T=Matte Tin over Nickel L=LCP P=PA9T W=Matte Tin over nickel 150µ" 2. Circuits:2-50 PIN Y=Bright Tin over Nickel 3. Tail Style: F= Gold Flash, Matte Tin 100µ" A=Gold 3µ" J=Gold 10µ" , Matte Tin 100µ" 4. Color: DR=SMT+90° L= Gold 15µ" , Matte Tin 100µ" B=Gold 3µ" M=Gold 15µ" , Matte Tin 100µ" C = ordinary gold plating U= Gold 30µ" D= Gold 5µ" V=Gold 30µ" Matte Tin 100µ" 6.Special Options 7. Packing: A=Bag B=Tube D=Small box E=Cap+Reel																																		
F	1	2	3	4	5	6	8																												
 东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD <table><tr><td>BOM</td><td>1:H3N20-250BKHC4</td><td>PART NO.</td><td>H3X20-2XXDRBKX000X</td><td>.X</td><td>.XX</td><td>.XXX</td></tr><tr><td></td><td>2:SQ0.4-8.4/10.9-X-C12</td><td>DRAWING NO</td><td>ZS-10277-P</td><td>±0.30</td><td>±0.20</td><td>±0.1</td></tr><tr><td></td><td>3:</td><td>DRAWN BY</td><td>Deng jin quan</td><td>2021-12-25</td><td>SCALE:1:1</td><td>ITEM: H3</td></tr><tr><td></td><td></td><td>APPROVAL BY</td><td>Chen xiao guang</td><td>2021-12-27</td><td>UNIT:M.M</td><td></td></tr></table> TEL:0769-85305015 FAX:0769-85845060					BOM	1:H3N20-250BKHC4	PART NO.	H3X20-2XXDRBKX000X	.X	.XX	.XXX		2:SQ0.4-8.4/10.9-X-C12	DRAWING NO	ZS-10277-P	±0.30	±0.20	±0.1		3:	DRAWN BY	Deng jin quan	2021-12-25	SCALE:1:1	ITEM: H3			APPROVAL BY	Chen xiao guang	2021-12-27	UNIT:M.M		Recommended P.C. Board SMD Layout 		
BOM	1:H3N20-250BKHC4	PART NO.	H3X20-2XXDRBKX000X	.X	.XX	.XXX																													
	2:SQ0.4-8.4/10.9-X-C12	DRAWING NO	ZS-10277-P	±0.30	±0.20	±0.1																													
	3:	DRAWN BY	Deng jin quan	2021-12-25	SCALE:1:1	ITEM: H3																													
		APPROVAL BY	Chen xiao guang	2021-12-27	UNIT:M.M																														
 Dim.G 5.37 1.27 Dim.A 3.00 0.12 Dim.D 5.50					Current Rating: 1 Amps Insulator Resistance: 1000 Megohms min Dielectric Withstanding: AC 300V Contact Resistance: 20mΩ MAX Operation Temperature: -40~+105°C Max processing temp: 230°C for 60seconds Max processing temp: 260°C for 10seconds Contact Material: Brass Insulator material: Standard: Polyester,UL 94V-0 Standard: PA6T Finish: Tin Gold Plated Standard: Gold Flash all over																														