

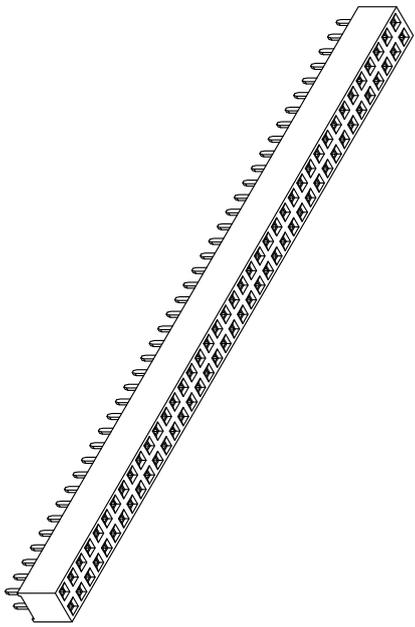

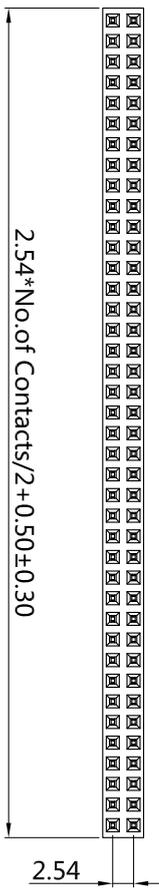


Current Rating: 3 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withstanding: AC 500V
Contact Resistance: 20mΩ MAX
Operation Temperature: -40~+105°C
Max processing temp: 230°C for 60seconds
Max processing temp: 260°C for 10seconds
Contact Material: Brass/Phosphor Bronze
Insulator material: Standard: Polyester, UL 94V-0
Standard: Nylon-6T

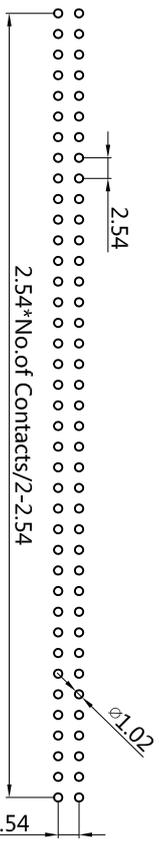

Recommended P.C. Board
SMD Layout

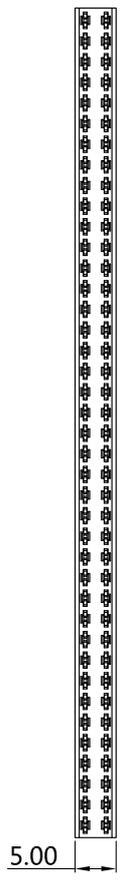

P1 X 57 X - 2 XX S0 BK X 000 X

1. Insulator material: 6. Contact Plated: 7. Special Options

- N=PA6T
- L=LCP P=PA9T
- 2. A=Phosphor Bronze
- B=Brass
- 3. Per Row: 02-40PIN
- 4. Tail Style: S0=180°
- 5. Color: BK=Black
- T=Matte Tin over Nickel
- W=Matte Tin over nickel 150μ"
- Y=Bright Tin over Nickel
- C = Putin
- F = Gold Flash, Matte Tin 100μ"
- A=Gold 3μ" , Matte Tin 100μ"
- B=Gold 3μ" , Matte Tin 100μ"
- D = Gold 5μ"
- 1 = gold plated 1 μ
- E=Gold 5μ" , Matte Tin 100μ"
- G=Gold 10μ" , Matte Tin 100μ"
- J=Gold 10μ" , Matte Tin 100μ"
- L = Gold 15μ" , Matte Tin 100μ"
- M=Gold 15μ" , Matte Tin 100μ"
- U = Gold 30μ" , Matte Tin 100μ"
- V=Gold 30μ" , Matte Tin 100μ"
- H = Contact area 1U" , Other areas 0.8U"
- 8. Packing: B=Tube C=Tray D=Small box E=Cap+Reel F=Cap+tube I=Mylar+Reel



东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD		PART NO.	P1X57X-2XXS0BKX000X	X	.XX	.XXX
DRAWING NO		ZS-00101-M	EDITION: A1	±0.30	±0.20	±0.1
DRAWN BY		Deng jin quan	2022-06-16	ITEM: P1		
APPROVAL BY		Chen xiao guang	2022-06-16	SCALE: 1:1		
UNIT: M.M						

1: P1X57-2XXBKHO01	BOM	2: P157B-S30-Y00-H11
3:		

TEL: 0769-85305015	FAX: 0769-85845060
--------------------	--------------------