
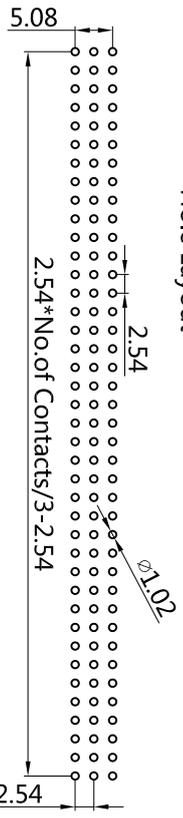
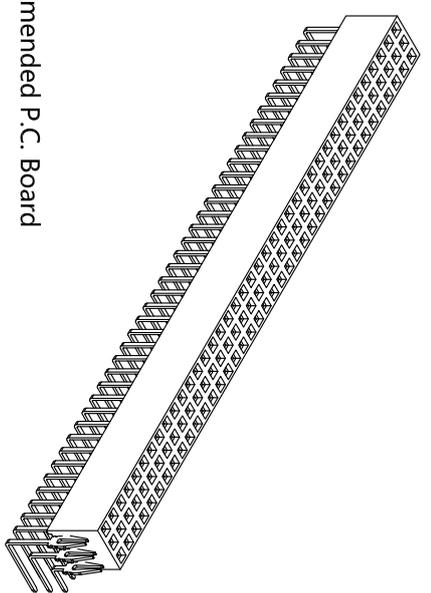
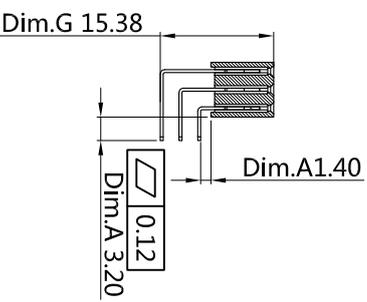
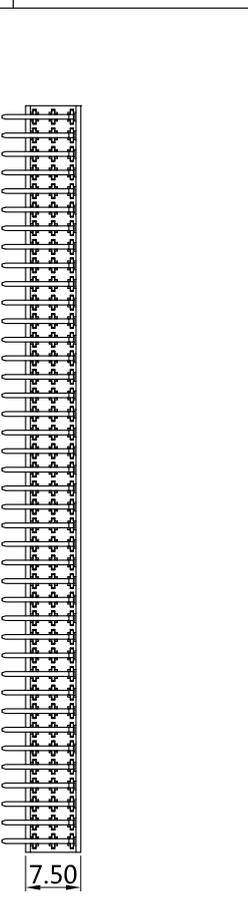
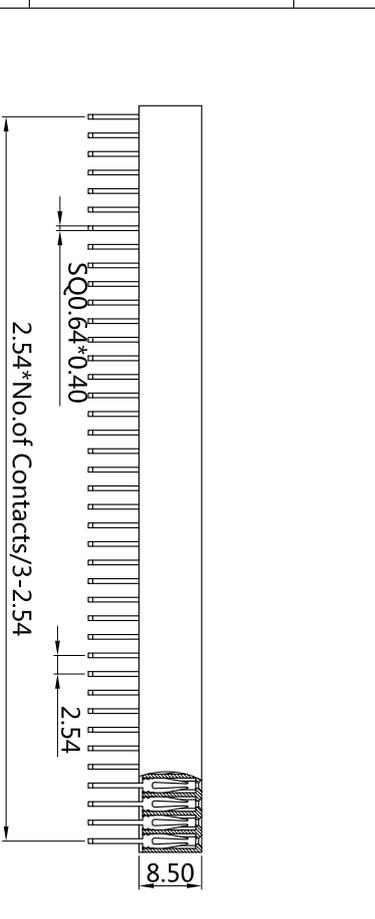
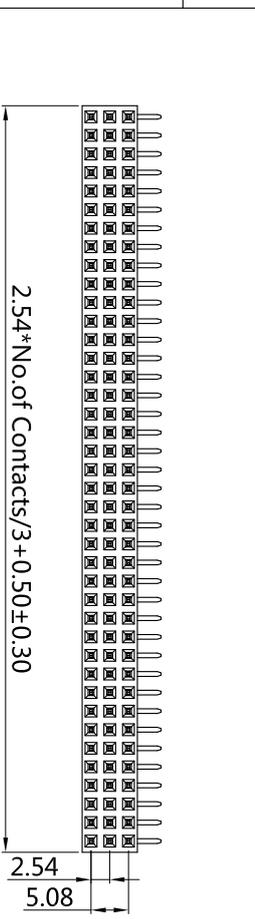


1 2 3 4 5 6 7 8

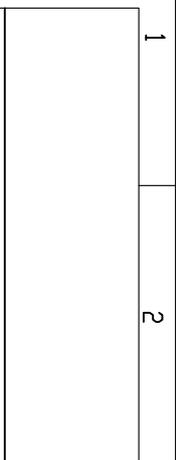

**(RoHS Compliant)**

**P1 X 85 X - 3 XX R0 BK X 000 X**

1. Insulator material: 6. Contact Plated:  
 N=PA6T  
 A=PBPT P=PA9T  
 2. A=Phosphor Bronze  
 B=Brass  
 3. Per Row:02-40PIN  
 4. Tail Style:  
 R0=90°  
 5. Color:  
 BK=Black

1 = gold plated 1 μ  
 E=Gold 5μ", Matte Tin 100μ"  
 G=Gold 10μ"  
 J=Gold 10μ", Matte Tin 100μ"  
 L=Gold 15μ"  
 M=Gold 15μ", Matte Tin 100μ"  
 U=Gold 30μ"  
 V=Gold 30μ", Matte Tin 100μ"  
 H=Contact area 1U", Other areas 0.8U"

7.Special Options

8. Packing:  
 B=Tube  
 C=Tray

|   |  |
|---|--|
| <p>东莞市震升电子有限公司<br/>DONG GUAN ZHEN SHEN ELECTRONICS CO., LTD</p> |  |
| 1:P1A85-3XXXBKHC1   |  |
| 2:P185B-R32-Y00-C2  |  |
| 3:P185B-R32-Y01-C2  |  |
| 4:P185B-2270-Y00-C11  |  |

|             |                     |             |          |           |
|-------------|---------------------|-------------|----------|-----------|
| PART NO.    | P1X85X-3XXR0BKX000X | X           | .XX      | .XXX      |
| DRAWING NO  | ZS-00489-M          | ±0.30       | ±0.20    | ±0.1      |
| DRAWN BY    | Deng jin quan       | EDITION: A1 | ITEM: P1 | SCALE:1:1 |
| APPROVAL BY | Chen xiao guang     | 2022-10-07  | UNIT:M.M |           |

Current Rating: 3 Amps  
 Insulator Resistance: 1000 MΩ min  
 Contact Resistance: 20 mΩ max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -40° ~ +85° C  
 Contact Material: Brass  
 Insulator Material: Polyester, UL 94V-0  
 Standard: PBT  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over  
 Note:  
 Duplex Plating: Gold Plated on contact area,  
 Tin on solder area  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds

F E D C B A