






1 2 3 4 5 6 7 8

A								A
---	--	--	--	--	--	--	--	---


Current Rating: 2 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withstanding: AC 500V
Contact Resistance: 20mΩ MAX
Operation Temperature: -40~+105°C
Max processing temp: 230°C for 60seconds
Max processing temp: 260°C for 10seconds
Contact Material: Brass/Phosphor Bronze
Insulator material: Standard: Polyester, UL 94V-0
Standard: Nylon-6T

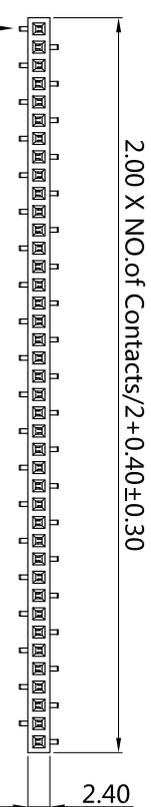

1PIN
B TYPE

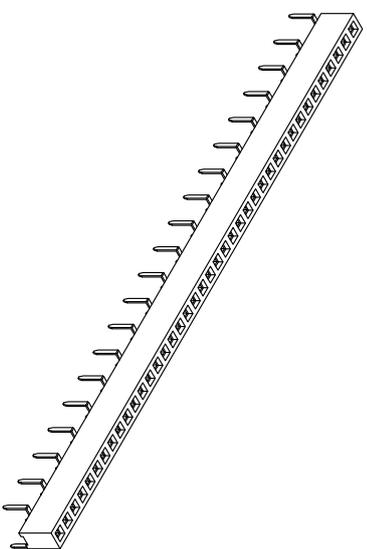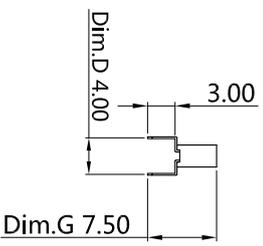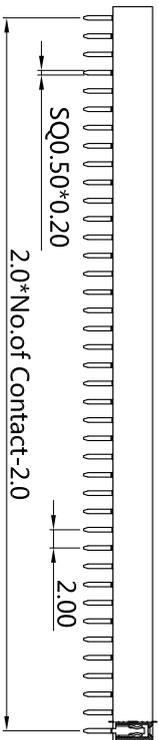

Recommended P.C. Board
SMD Layout

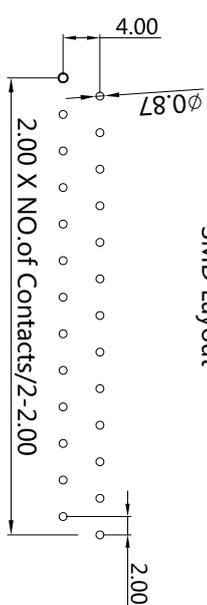

(RoHS Compliant) P2 X 43 X - 2 XX NB BK X 000 X

1. Insulator material: 6. Contact Plated:
- N=PA6T
 - L=LCP P=PA9T
 - 2. A=Phosphor Bronze
 - B=Brass
 - 3. Per Row:02-40PIN
 - 4. Tail Style: NA=A Tapv NB=8 Tapv 5. Color: BK=Black
6. Contact Plated:
- T=Matte Tin over Nickel
 - W=Matte Tin over nickel 150μ"
 - Y=Bright Tin over Nickel
 - C = Putin
 - F = Gold Flash, Matte Tin 100μ"
 - A=Gold 3μ"
 - B=Gold 3μ"
 - D = Gold 5μ"
- 7.Special Options
- I = gold plated 1 μ
 - E=Gold 5μ"
 - G=Gold 10μ"
 - J=Gold 10μ"
 - L= Gold 15μ"
 - M=Gold 15μ"
 - U = Gold 30μ"
 - V=Gold 30μ"
 - H = Contact area 1U"
8. Packing:
- B = Tube
 - C=Tray
 - D=Small box
 - E=Cap+Reel
 - F=Cap+tube
 - I=Mylar+Reel



东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD	
PART NO.	P2X43X-1XXNBKX000X
DRAWING NO	ZS-00239-M
DRAWN BY	Deng jin quan
EDITION:	A1
ITEM:	P2
SCALE:	1:1

BOM	1:P2X43-1XXNBKHC1	DRAWING NO	ZS-00239-M	EDITION:	A1	ITEM:	P2
	2:P243A-T30-U00-C11	DRAWN BY	Deng jin quan	SCALE:	1:1	UNIT:	M:M
	3:	APPROVAL BY	Chen xiao guang				

TEL:0769-85305015 FAX:0769-85845060

1 2 3 4 5 6 7 8