
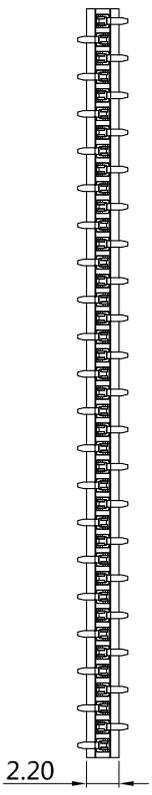
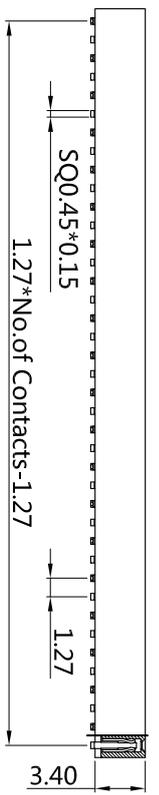




1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

B Type

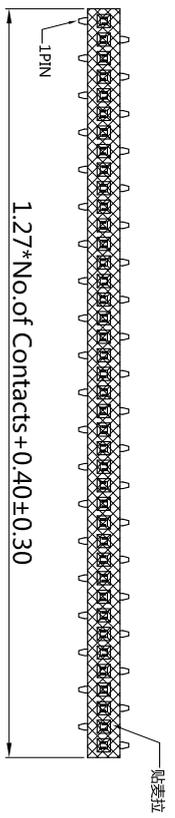


- Current Rating: 1 Amps
- Insulator Resistance: 1000 Megohms min
- Contact Resistance: 20 m ohms max
- Dielectric Withstanding: AC 500 V
- Operating Temperature: - 40° ~ +105° C
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0
- Max Processing Temp: 230° C for 60 seconds
- Max Processing Temp: 260° C for 10 seconds

Dim.G 3.70

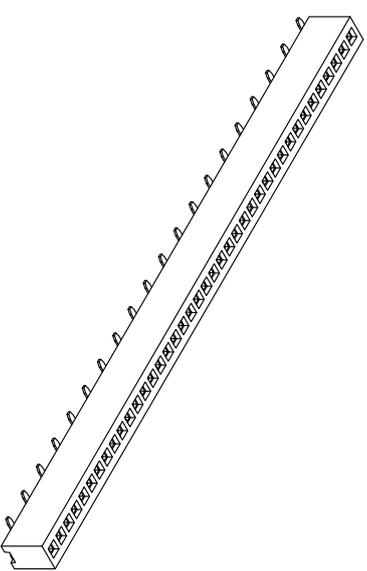

Recommended P.C. Board SMD Layout

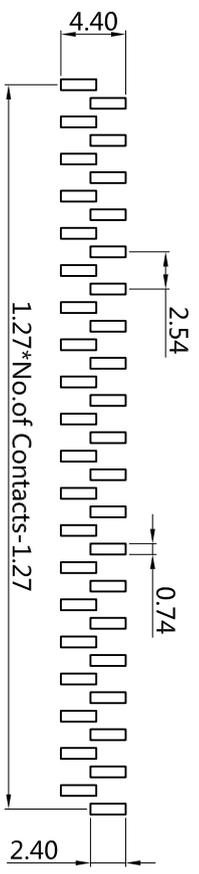

(RoHS Compliant) P3 X 34 - 1 XX DBBK X 000 I

- Insulator material: N=PA6T, L=LCP, P=PA9T
- Per Row: 02-50PIN
- Taill Style: DA=A Tapy, DB=B Tapy, 4. Color: BK=Black
- Contact Plated: T=Matte Tin over Nickel, W=Matte Tin over Nickel, Y=Bright Tin over Nickel
- Special Options: I = gold plated 1 μ, E=Gold 5μ", G=Gold 10μ", J=Gold 10μ", L=Gold 15μ", M=Gold 15μ", U=Gold 30μ", V=Gold 30μ", H=Contact area 1U", Other areas 0.8U"
- Packaging: B=Tube, C=Tray, E=Cap+Reel, F=Cap+tube, G=Cap+tray, I=Mylar+Reel



PART NO.	P3X34-1XXDBBKX000I	X	.XX	.XXX
DRAWING NO	ZS-10078-M	±0.30	±0.20	±0.1
EDITION:	A1			
ITEM:	P3			
SCALE:	1:1			

BOM	1:P3N34-150BKHC1			
	2:P334A-D47-U00-C11			
	3:			
DRAWN BY	Deng jin quan	2022-11-30	SCALE:1:1	
APPROVAL BY	Chen xiao guang	2022-12-01	UNIT:M.M	

TEL:0769-85305015 FAX:0769-85845060

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---