


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---


1.27*No.of Contacts/2+0.4±0.3

2.20

Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester,UL 94V-0
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

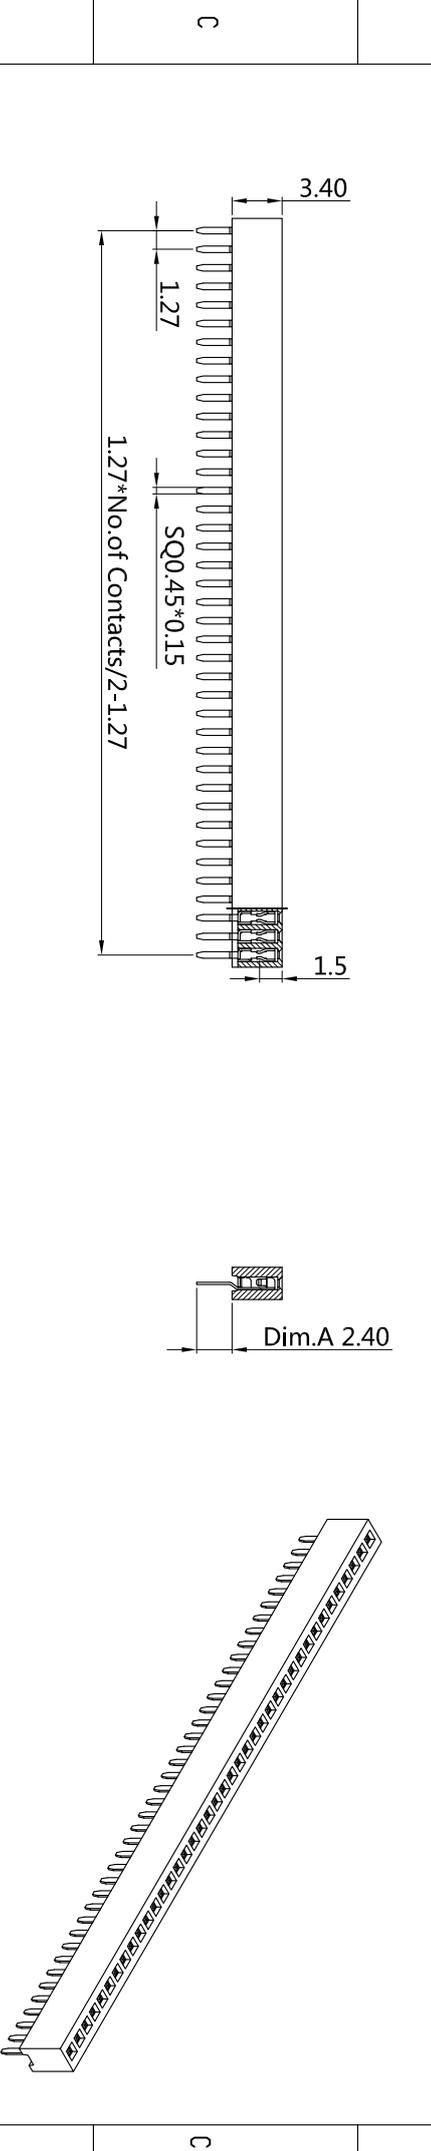

Recommended P.C. Board
SMD Layout

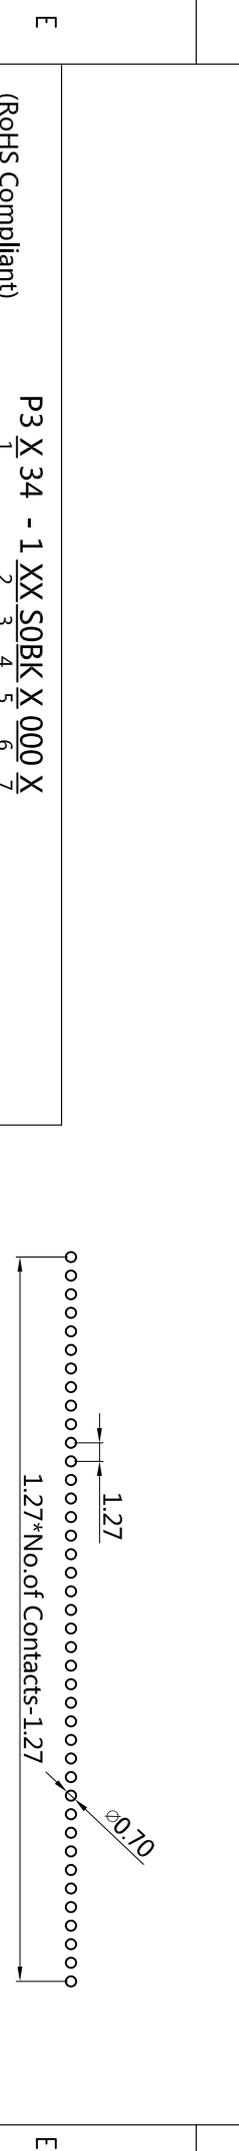

(RoHS Compliant)

P3 X 34 - 1 XX S0BK X 000 X

1. Insulator material: 5. Contact Plated:
 N=PA6T T=Matte Tin over Nickel
 L=LCP P=PA9T W=Matte Tin over nickel 150µ"
 2. Per Row:02-50PIN Y=Bright Tin over Nickel
 3. Tail Style: C = Putfin
 S0=180° F= Gold Flash, Matte Tin 100µ"
 4. Color: A=Gold 3µ", Matte Tin 100µ"
 BK=Black B=Gold 3µ", Matte Tin 100µ"
 D= Gold 5µ"

6.Special Options
 7.Packing:
 I = gold plated 1 µ E=Gold 5µ", Matte Tin 100µ"
 G=Gold 10µ", Matte Tin 100µ"
 J=Gold 10µ", Matte Tin 100µ"
 L= Gold 15µ", Matte Tin 100µ"
 M=Gold 15µ", Matte Tin 100µ"
 U= Gold 30µ", Matte Tin 100µ"
 V=Gold 30µ", Matte Tin 100µ"
 H= Contact area 1U", Other areas 0.8U"

1. Packing:
 B=Tube
 C=Tray
 E=Cap+Reel
 F=Cap+tube
 G=Cap+tray
 I=Mylar+Reel

东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD		PART NO.	P3X34-1XXS0BKX000X	X	.XX	.XXX
BOM	1:P3N34-150BKHC1	DRAWING NO	ZS-00017-M	EDITION: A1	ITEM: P3	SCALE:1.1
	2:P334A-S24-U00-C11	DRAWN BY	Deng jin quan	2022-11-30	SCALE:1.1	
	3:	APPROVAL BY	Chen xiao guang	2022-12-01	UNIT:M.M	

TEL:0769-85305015 FAX:0769-85845060