

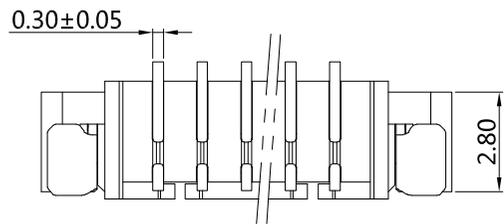





1	2	3	4	5	6	7	8
日期	版本	变更内容	变更人	审核			

Current Rating: 1 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withtanding: AC 125V
Contact Resistance: 20MΩ max
Operation Temperature: -25~+85°C
Withstanding Voltage: 500V AC/minute
Contact Material: Brass
Insulator material: Standard: Polyester,UL 94V-0
Standard: LCP

Dimensions m m		
PIN	A	B
02	1.25	4.25
03	2.50	5.50
04	3.75	6.75
05	5.00	8.00
06	6.25	9.25
07	7.50	10.50
08	8.75	11.75
09	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

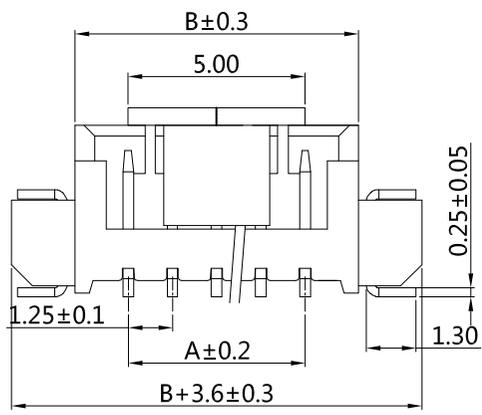

Recommended P.C. Board SMD Layout

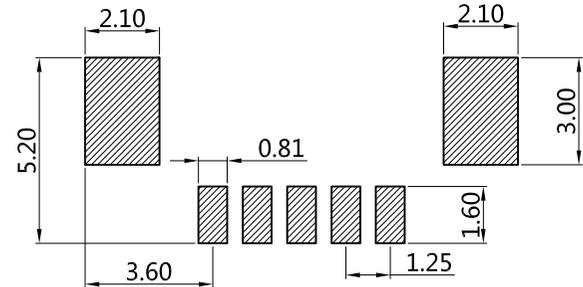

WF125JL-105 SD TC Y 001 E
1 2 3 4 5 6 7

(RoHS Compliant)

- 1. Insulator material: N=PA9T L=LCP
- 2. Circuits: 1-15PIN
- 3. Taill Style: SD= 180 SMT
- 4. Color: TC=NATURAL
- 5. Contact Plated: Y=Bright Tin over Nickel N=Gold Flash , Ni
- 6.Special Options
- 7. Packing: A=Bag E=Cap+Reel


东莞市震升电子有限公司
DONG GUAN ZHEN SHENG ELECTRONICS CO.,LTD
TEL:0769-85305015 FAX:0769-85845060

PART NO.	WF125JL-105SDTCY001E	.X ±0.25	.XX ±0.20	.XXX ±0.1
DRAWING NO	ZS-20007-W	EDITION:A0	ITEM: WF125	
DRAWN BY	Deng Jin Quan	2023-4-24	SCALE:1:1	
APPROVAL BY	Chen xiao guang	2023-4-25	UNIT:M.M	