



1	2	3	4	6	7	8
日期	版本	变更内容	变更人	审核		

SPECIFICATIONS




Current Rating: 1A AC DC
 Voltage Rating: 50V AC DC
 Insulator Resistance: 1000 MΩ min
 Dielectric Withtanding: AC 125V
 Contact Resistance: 20MΩ max
 Operation Temperature: -25~+85°C
 Withstanding Voltage: 500V AC/minute

WAFER
 MATERIAL: PA6T UL 94V-0
 Pin: Phosper Bronze/Gold-plated
 Solder Tabs: Bronze/Gold-plated
 CAP: LCP UL94V-0

PIN	Dimensions		
	A	B	C
4	3.00	6.30	4.40
5	4.00	7.30	5.40
6	5.00	8.30	6.40
7	6.00	9.30	7.40
8	7.00	10.30	8.40
9	8.00	11.30	9.40
10	9.00	12.30	10.40
12	11.00	14.30	12.40
14	13.00	16.30	14.40
15	14.00	17.30	15.40
17	16.00	19.30	17.40
20	19.00	22.30	20.40
25	24.00	27.30	25.40
30	29.00	32.30	30.40

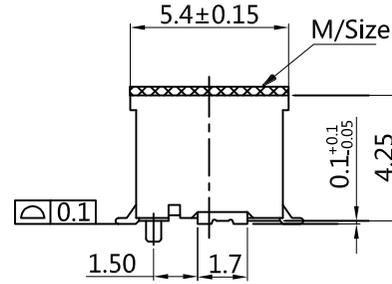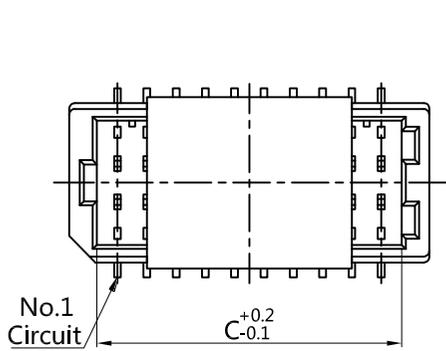


4, 5, 6, Pin - Mylar

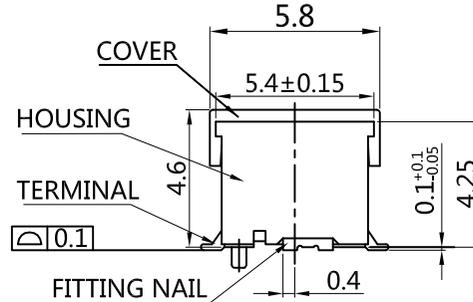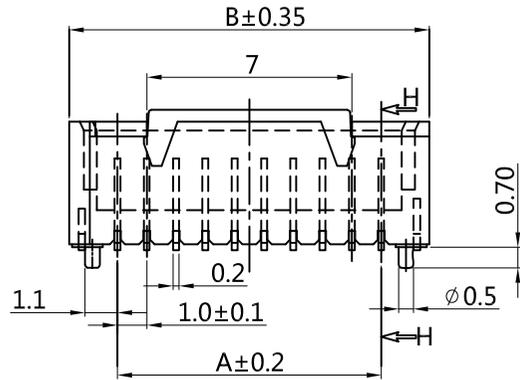

8~30 Pin - Coer

Recommended P.C. Board SMD Layout

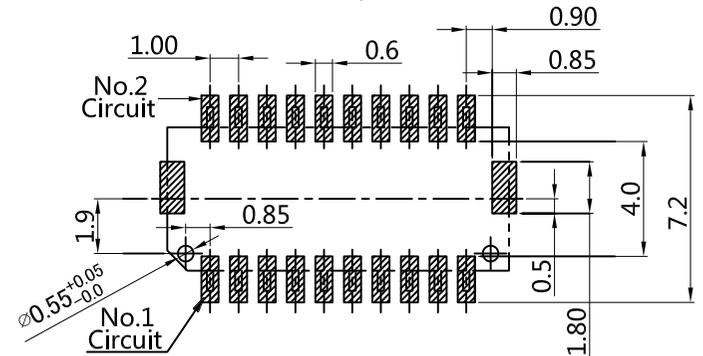

WF10JN-2XX D1 BE C 000 E
 1 2 3 4 5 6 7

(RoHS Compliant)

- | | | |
|--|------------------------------------|---|
| 1. Insulator material:
N=PA9T L=LCP | 4. Color:
BE=Beige | 6.Special Options |
| 2. Circuits: 4-30PIN | 5. Contact Plated:
C=Gold flash | 7. Packing:
E=Cap+Reel
E=Mylar+Reel |
| 3. Taill Style:
D1=SMT+Pillars | | |



东莞市震升电子有限公司
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM	1:	PART NO.	WF10JN-2XXD1BEC000E	.X ±0.25	.XX ±0.20	.XXX ±0.1
	2:	DRAWING NO	ZS-20011-W	EDITION:A0		ITEM: WF1.0
	3:	DRAWN BY	Deng Jin Quan	2023-11-10		SCALE:1:1
TEL:0769-85305015 FAX:0769-85845060		APPROVAL BY	Chen xiao guang	2023-11-10		UNIT:M.M