
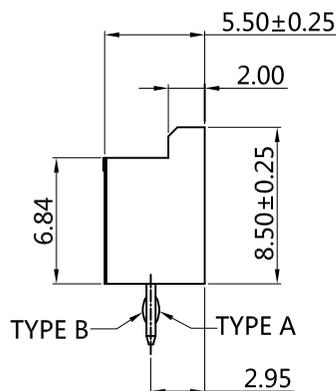
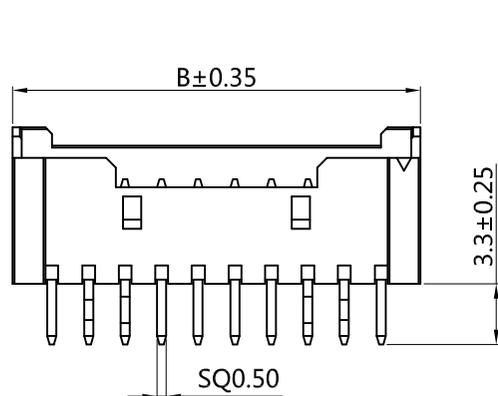




1	2	3	4	5	6	7	8
日期	版本	变更内容	变更人	审核			


SPECIFICATIONS

Current rating : 2A AC,DC
 Voltage rating : 125V AC , DC
 Temperature range : -40° ~ +105° C
 Contact resistance : 20mΩ Max
 Insulation resistance : 1000MΩ min
 Withstand Voltage: 500V AC/minute
 Contact Material : Brass
 Finished : Tin-plated
 Housing Material : PA66-UL94V-0
 Color : IVORY

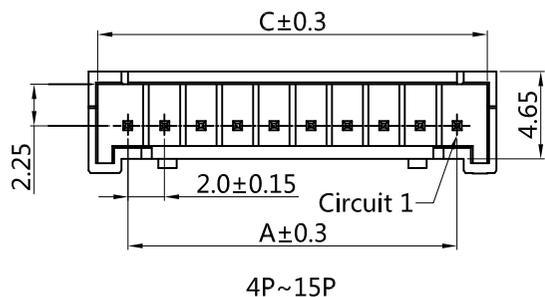

Circuits	Circuits No.									
	TYPE	1	2	3	4	5	6	N-2	N-1	N
2P	A	B								
3P	A	B	A							
4P	A	B	B	A						
5P	A	B	-	B	A					
6P	-	A	B	B	A	-				
7P~15P	-	A	B	-	-	-	B	A	-	

Circuits	Dimensions		
	A	B	C
2	2.00	7.70	5.30
3	4.00	9.70	7.30
4	6.00	10.30	9.30
5	8.00	12.30	11.30
6	10.00	14.40	13.30
7	12.00	16.40	15.50
8	14.00	18.40	17.50
9	16.00	20.50	19.60
10	18.00	22.50	21.60
11	20.00	24.60	23.60
12	22.00	26.60	25.70
13	24.00	28.70	27.70
14	26.00	30.70	29.70
15	28.00	32.80	31.60

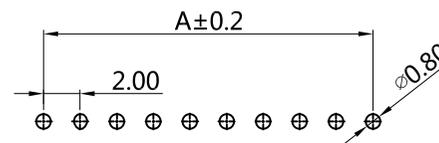

P.C.B LAYOUT

WF20JV - 1 XX S1 IY X 002 X
 1 2 3 4 5 6 7

(RoHS Compliant)

- | | | | |
|---------------------------------|-----------------------------|--|----------------------|
| 1. Insulator material
V=PA66 | 3. Tail Style:
S1=180°打K | 5. Contact Plated:
Y=Bright Tin over Nickel | 6.Special Options |
| 2. Per Row: 2-20PIN | 4. Color:
IY=IVORY | | 7. Packing:
A=Bag |



东莞市震升电子有限公司
DONG GUAN ZHEN SHENG ELECTRONICS CO.,LTD

BOM 1: D3043
 2: JF-202-W**STA
 3:

TEL:0769-85305015 FAX:0769-85845060

PART NO.	WF20JV- 1XXS1IYX002X	.X	.XX	.XXX
Product name	Wafer 2.0mm 180° 打K	±0.30	±0.20	±0.1
DRAWING NO	ZS-20016-W	EDITION:A1	ITEM: WF2.0	
DRAWN BY	Deng jin quan	2024-1-03	SCALE:1:1	
APPROVAL BY	Chen xiao guang	2024-1-03	UNIT:M.M	