
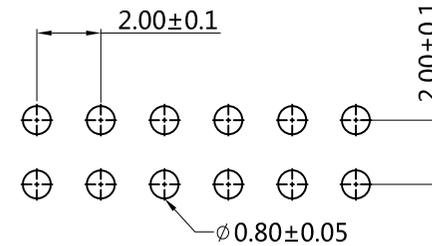
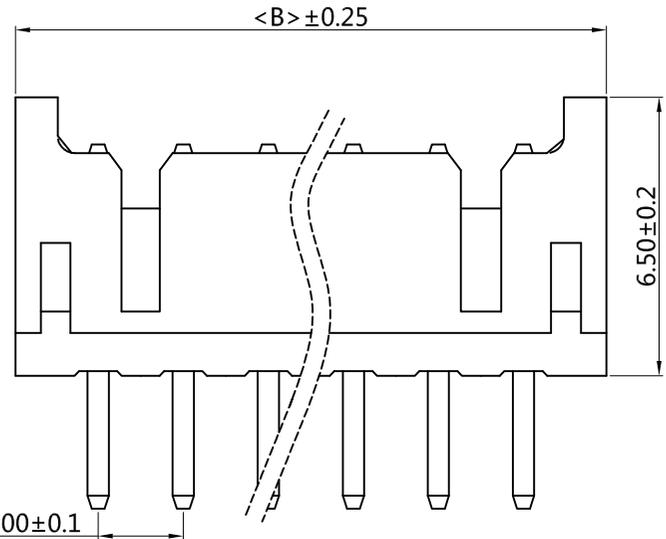
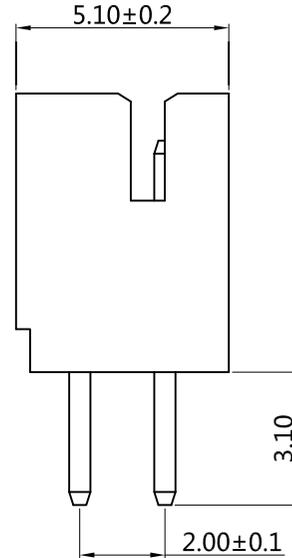


SPECIFICATIONS

Current Rating: 2A AC DC
 Voltage Rating: 250V AC DC
 Insulator Resistance: 800MΩ min
 Contact Resistance: 20MΩ max
 Operation Temperature: -25~+85°C
 Withstanding Voltage: 800V AC/minute
WAFER
 Pin: Phosphor Brass/Gold flash
MATERIAL: PA66 15G/F UL 94V-0
 Color: BEIGE

Circuits:	Dimensions(mm)	
	A	B
02	6.00	2.00
03	8.00	4.00
04	10.00	6.00
05	12.00	8.00
06	14.00	10.00
07	16.00	12.00
08	18.00	14.00
09	20.00	16.00
10	22.00	18.00
11	24.00	20.00
12	26.00	22.00
13	28.00	24.00
14	30.00	26.00
15	32.00	28.00
16	34.00	30.00
17	36.00	32.00
18	38.00	34.00
19	40.00	36.00
20	42.00	38.00

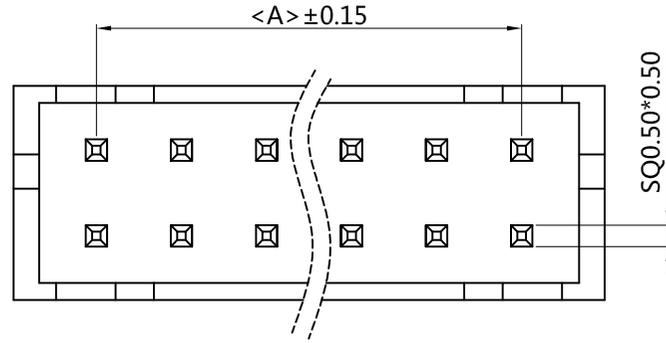

RECOMMEND PCB LAUOUT

WF20JV-2XX S0 BE X 001 X
 1 2 3 4 5 6 7

(RoHS Compliant)

- | | | | |
|----------------------------------|-----------------------|---|----------------------|
| 1. Insulator material:
V=PA66 | 4. Color:
BE=BEIGE | 5. Contact Plated:
Y=Bright Tin over Nickel
T=Matte Tin over Nickel
C=Gold flash | 6.Special Options |
| 2. Circuits: 2-20PIN | | | 7. Packing:
A=Bag |
| 3. Tail Style:
S0=180° | | | |



东莞市震升电子有限公司
 DONG GUAN ZHEN SHENG ELECTRONICS CO.,LTD

BOM 1:
 BOM 2:
 BOM 3:
 TEL:0769-85305015 FAX:0769-85845060

PART NO.	WF20V-2XXS0BEX001A	.X	.XX	.XXX
Product name	PHD2.0mm 180°Wafer	±0.30	±0.20	±0.1
DRAWING NO	ZS-20005-W	EDITION:A1		ITEM: WF2.0
DRAWN BY	Deng jin quan	2024-03-18		SCALE:1:1
APPROVAL BY	Chen xiao guang	2024-03-18		UNIT:M.M