

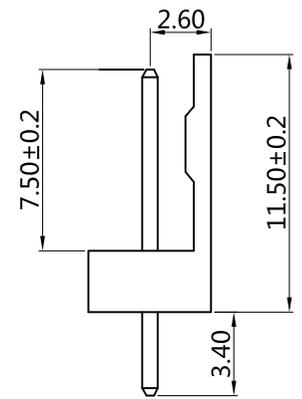
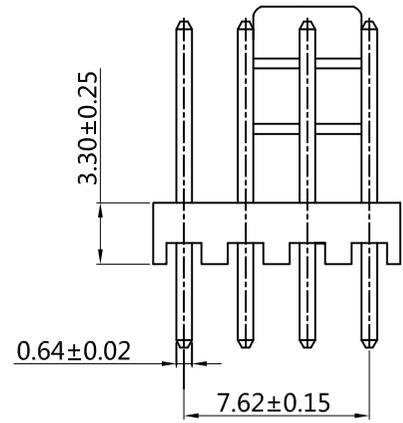


1	2	3	4	6	7	8
日期	版本	变更内容	变更人	审核		


SPECIFICATIONS

Current Rating: 3A AC DC
Voltage Rating: 250V AC DC
Insulator Resistance: 1000MΩ min
Contact Resistance: 20MΩ max
Operation Temperature: -25~+85°C
Withstanding Voltage: 1000V AC/minute

WAFER
Material:pin: Brass tin-plated
MATERIAL: Nylon 66 UL 94V-2
Color: NATURAL



Recommended P.C. Board
SMD Layout



WF25MV-104 S0 TC Y 002 A

1 2 3 4 5 6 7

(RoHS Compliant)

- 1. Insulator material: V=PA66
- 2. Circuits: 04PIN
- 3. Taill Style: S0=180°
- 4. Color: TC=NATURAL
- 5. Contact Plated: Y=Bright Tin over Nickel
- 6.Special Options
- 7. Packing: A=Bag

BOM	1:	PART NO.	WF25MV-104S0TCY002A	.X ±0.25	.XX ±0.20	.XXX ±0.1				
	2:						DRAWING NO	ZS-20020-W	EDITION:A0	ITEM: WF2.5
	3:						DRAWN BY	Deng Jin Quan	2024-2-23	SCALE:1:1
TEL:0769-85305015 FAX:0769-85845060		APPROVAL BY	Chen xiao guang	2024-2-23	UNIT:M.M					

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---