
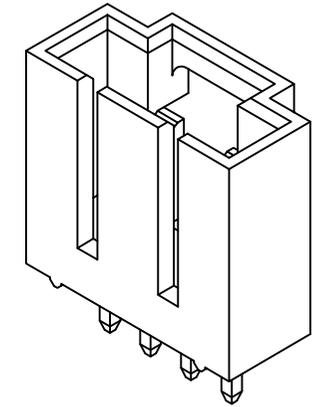
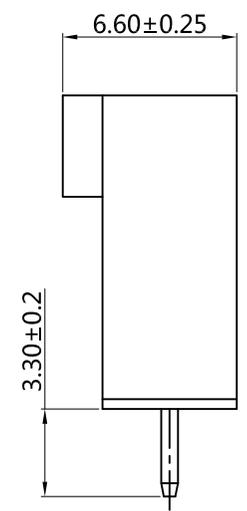
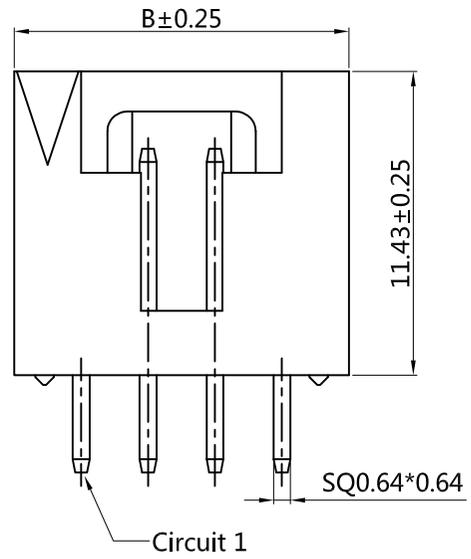


1	2	3	4	6	7	8
日期	版本	变更内容	变更人	审核		


**SPECIFICATIONS**

Current Rating: 2.5A AC DC  
Voltage Rating: 250V AC DC  
Insulator Resistance: 1000MΩ min  
Contact Resistance: 20MΩ max  
Operation Temperature: -25~+85°C  
Withstanding Voltage: 1000V AC/minute  
MATERIAL: PBT+30%GF UL 94V-0 Black  
Pin Material: Brass/ Tin-plated

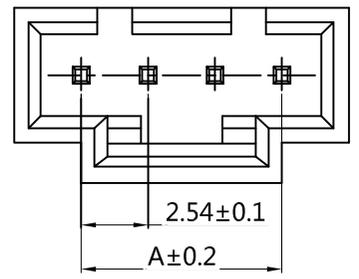

Circuits:	Dimensions	
	A	B
02	2.54	7.62
03	5.08	10.16
04	7.62	12.70
05	10.16	15.24
08	17.78	22.86

Recommended P.C. Board  
SMD Layout



**WF25MA-1XX S0 BK X 000 X**  
1 2 3 4 5 6 7

(RoHS Compliant)

- 1. Insulator material: A=PBT
- 2. Circuits: 2-08PIN
- 3. Taill Style: SK=180°
- 4. Color: BK=Black
- 5. Contact Plated: T=Matte Tin over Nickel
- 6.Special Options
- 7. Packing: A=Bag

BOM	1:	PART NO.	WF25MV-1XXS0BKX000X	.X ±0.25	.XX ±0.20	.XXX ±0.1				
	2:						DRAWING NO	ZS-20021-W	EDITION:A1	ITEM: WF2.54
	3:						DRAWN BY	Deng Jin Quan	2024-3-27	SCALE:1:1
	TEL:0769-85305015 FAX:0769-85845060						APPROVAL BY	Chen xiao guang	2024-3-27	UNIT:M.M



东莞市震升电子有限公司  
DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

F