
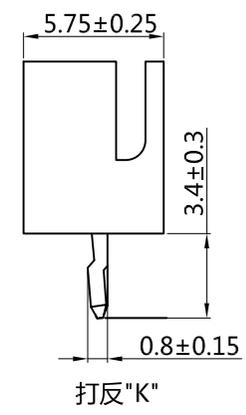

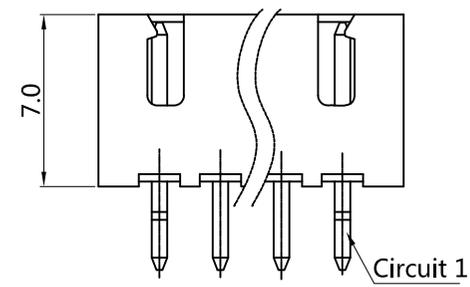





1	2	3	4	6	7	8
日期	版本	变更内容	变更人	审核		

SPECIFICATIONS
 Current Rating: 3A AC DC
 Voltage Rating: 250V AC DC
 Insulator Resistance: 1000MΩ min
 Contact Resistance: 10MΩ max
 Operation Temperature: -40~+105°C
 Withstanding Voltage: 800V AC/minute
WAFER
 Material:pin: Brass tin-plated
 MATERIAL: Nylon 66 UL 94V-0
 Color: NATURAL

PIN	Dimension mm	
	A	B
2	7.50	2.50
3	10.00	5.00
4	12.50	7.50
5	15.00	10.00
6	17.50	12.50
7	20.00	15.00
8	22.50	17.50
9	25.00	20.00
10	27.50	22.50
11	30.00	25.00
12	32.50	27.50
13	35.00	30.00
14	37.50	32.50
15	40.00	35.00
16	42.50	37.50



Recommended P.C. Board
SMD Layout

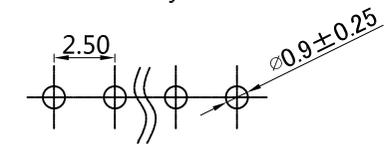

WF25MV-1XX S0 WH Y 001 A
 1 2 3 4 5 6 7

(RoHS Compliant)

- 1. Insulator material: V=PA66
- 2. Circuits: 02-16PIN
- 3. Taill Style: S0=180°
S1=打正 "K" 180°
S2=打反 "K" 180°
- 4. Color: WH=White
- 5. Contact Plated: Y=Bright Tin over Nickel
- 6.Special Options
- 7. Packing: A=Bag

BOM	1:	PART NO.	WF25MV-1XXS0WHY001A			.X ±0.25	.XX ±0.20	.XXX ±0.1
	2:		DRAWING NO	ZS-20028-W	EDITION:A0	ITEM: WF2.5		
	3:		DRAWN BY	Deng Jin Quan	2024-4-06	SCALE:1:1		
	TEL:0769-85305015 FAX:0769-85845060		APPROVAL BY	Chen xiao guang	2024-4-06	UNIT:M.M		

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---