
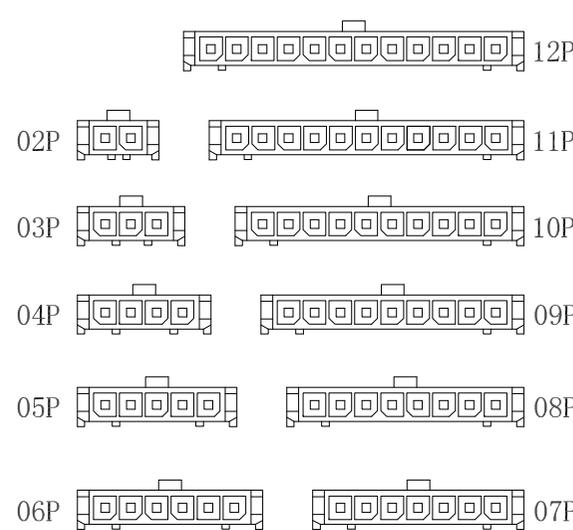

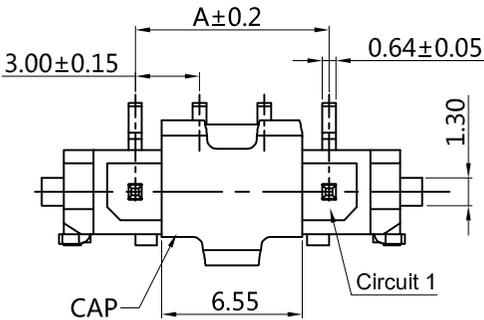


1	2	3	4	5	6	7	8
日期	版本	变更内容	变更人	审核			

SPECIFICATIONS


Current Rating: 5A AC DC
 Voltage Rating: 250V AC DC
 Insulator Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Operation Temperature: -25~+85°C
 Withstanding Voltage: 1500V AC/minute
 MATERIAL: LCP UL 94V-0 Black
 Pin Material: Brass/ Tin-plated

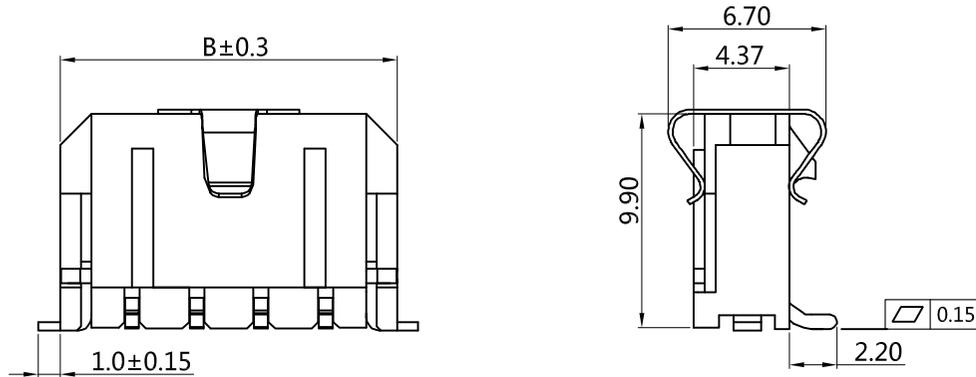

Circuits:	Dimensions		
	A	B	C
02	3.00	9.65	14.20
03	6.00	12.65	17.20
04	9.00	15.65	20.20
05	12.00	18.65	23.20
06	15.00	21.65	26.20
07	18.00	24.65	29.20
08	21.00	27.65	32.20
09	24.00	30.65	35.20
10	27.00	33.65	38.20
11	30.00	36.65	41.20
12	33.00	39.65	44.20

CIRCUIT SIZE LAYOUT

Recommended P.C. Board

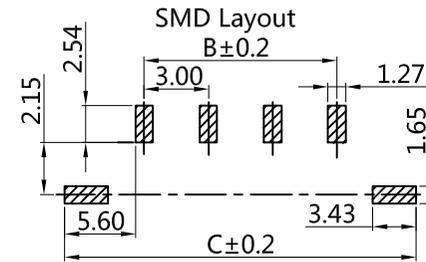

WF30ML-1XX D0BK X 000 X
 1 2 3 4 5 6 7

(RoHS Compliant)

- | | | | |
|---------------------------------|-----------------------|---|------------------------------------|
| 1. Insulator material:
L=LCP | 4. Color:
BK=Black | 5. Contact Plated:
T=Matte Tin over Nickel | 6.Special Options |
| 2. Circuits: 2-12PIN | | | 7. Packing:
A=Bag
E=Cap+Reel |
| 3. Taill Style:
D0=SMT | | | |



东莞市震升电子有限公司
 DONG GUAN ZHEN SHENG ELECTRONICS CO.,LTD

BOM	1:	PART NO.	WF30ML-1XXD0BKX000X	.X ±0.25	.XX ±0.20	.XXX ±0.1
	2:	DRAWING NO	ZS-20024-W	EDITION:A0	ITEM: WF3.0	
	3:	DRAWN BY	Deng Jin Quan	2024-3-27	SCALE:1:1	
TEL:0769-85305015 FAX:0769-85845060		APPROVAL BY	Chen xiao guang	2024-3-27	UNIT:M.M	