


1	2	3	4	5	6	7	8
日期	版本	变更内容	变更人	审核			



**SPECIFICATIONS**

Current rating : 5A AC,DC  
Voltage rating : 250V AC , DC  
Temperature range : -25° ~ +85° C  
Contact resistance : 10mΩ Max  
Insulation resistance : 1000MΩ min  
Withstand Voltage : 1000V AC/minute  
Contact Material : Brass  
Finished : Tin-plated  
Housing Material : LCP-UL94V-0  
Color : Black

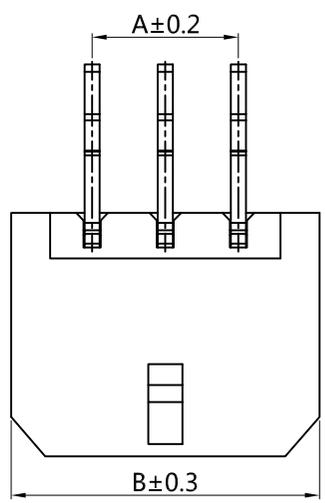

Dimensions

Circuits	A	B
2	--	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

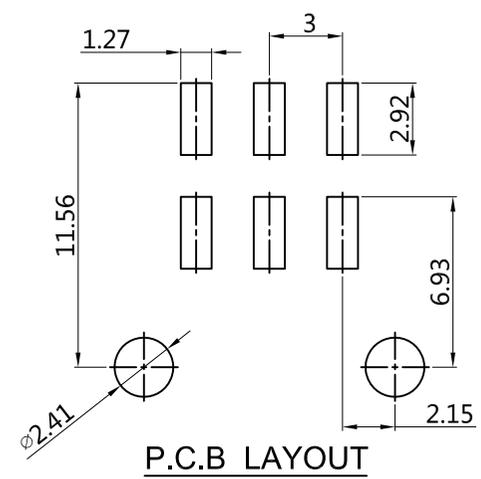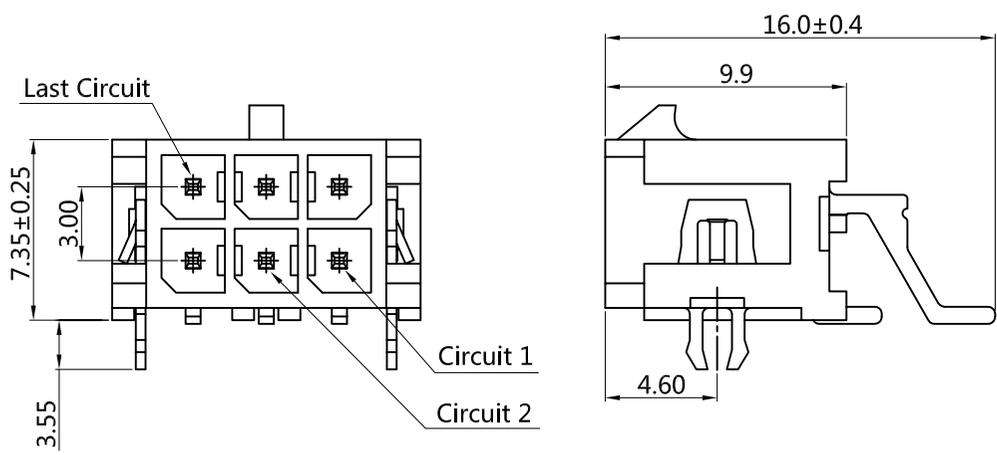

**WF30ML-2 XX DS BK X 000 N**  
1 2 3 4 5 6 7

(RoHS Compliant)

- |                                 |   |                       |
|---------------------------------|---|-----------------------|
| 1. Insulator material:<br>L=LCP | 4. Color:<br>BK=Black                         | 6.Special Options     |
| 2. Circuits: 2-24PIN            | 5. Contact Plated:<br>T=Matte Tin over Nickel | 7. Packing:<br>N=Reel |
| 3. Taill Style:<br>DS= R/S SMD  |   |                       |

BOM	1:D3047	PART NO.	WF30ML-2XXDSBKX000N	.X	.XX	.XXX
	2:	Product name	3.0MX 双排卧贴鱼叉	±0.30	±0.20	±0.1
	3:	DRAWING NO	ZS-20015-W	EDITION:A1	ITEM: WF2.0	
		DRAWN BY	Deng jin quan	2023-11-15	SCALE:1:1	
		APPROVAL BY	Chen xiao guang	2023-11-15	UNIT:MM	
TEL:0769-85305015 FAX:0769-85845060						

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---