

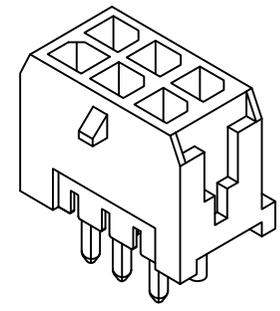
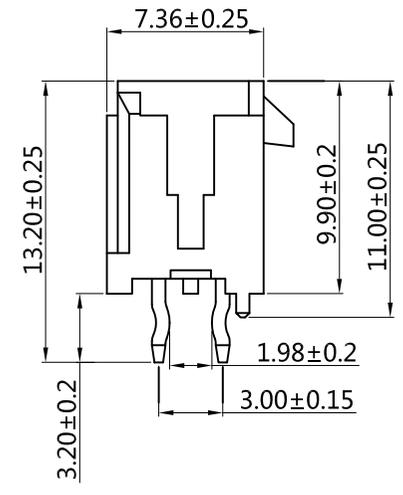


SPECIFICATIONS


Current Rating: 5A AC DC
 Voltage Rating: 250V AC DC
 Insulator Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Operation Temperature: -25~+85°C
 Withstanding Voltage: 1500V AC/minute
 MATERIAL: Nylon 46 UL 94V-0 Black
 Pin Material: Brass/ Tin-plated

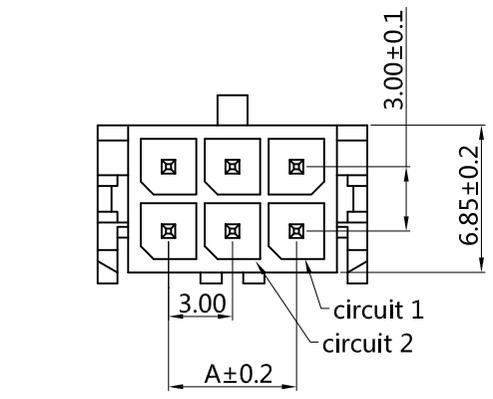

| Circuits: | Dimensions | |
|-----------|------------|-------|
| | A | B |
| 01 | -- | 9.65 |
| 02 | 3.00 | 9.65 |
| 03 | 6.00 | 12.65 |
| 04 | 9.00 | 15.65 |
| 05 | 12.00 | 18.65 |
| 06 | 15.00 | 21.65 |
| 07 | 18.00 | 24.65 |
| 08 | 21.00 | 27.65 |
| 09 | 24.00 | 30.65 |
| 10 | 27.00 | 33.65 |
| 11 | 30.00 | 36.65 |
| 12 | 33.00 | 39.65 |

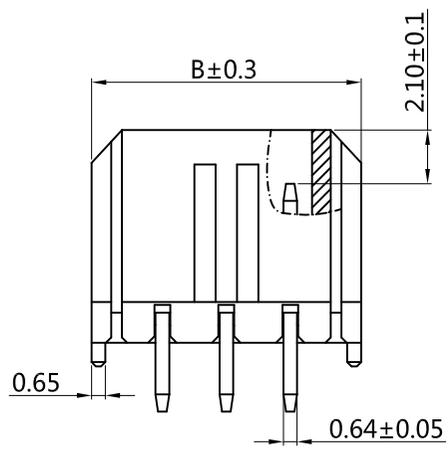

Recommended P.C. Board SMD Layout

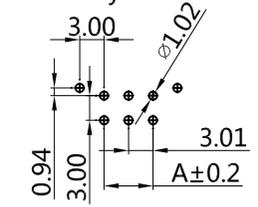

WF30MN-2XX SK BK X 000 X
 1 2 3 4 5 6 7

(RoHS Compliant)

- | | | | |
|----------------------------------|-----------------------|---|----------------------|
| 1. Insulator material: N=PA46 | 4. Color: BK=Black | 5. Contact Plated: T=Matte Tin over Nickel | 6.Special Options |
| 2. Circuits: 2-12PIN | | | 7. Packing: A=Bag |
| 3. Taill Style: SK=180°+打K | | | |

| | | | | | | |
|-----|-------------------------------------|------------|---------------------|------------------|-------------------|-------------------|
| BOM | 1: | PART NO. | WF30MN-2XXSKBKX000X | .X ± 0.25 | .XX ± 0.20 | .XXX ± 0.1 |
| | 2: | DRAWING NO | ZS-20025-W | EDITION:A1 | ITEM: WF3.0 | |
| | 3: | DRAWN BY | Deng Jin Quan | 2024-3-25 | SCALE:1:1 | |
| | TEL:0769-85305015 FAX:0769-85845060 | | APPROVAL BY | Chen xiao guang | 2024-3-25 | UNIT:M.M |