
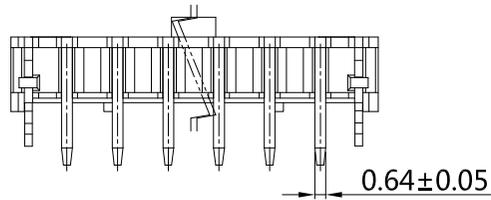
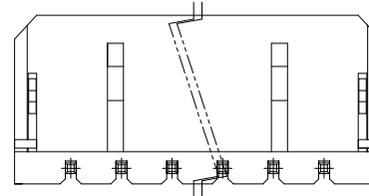

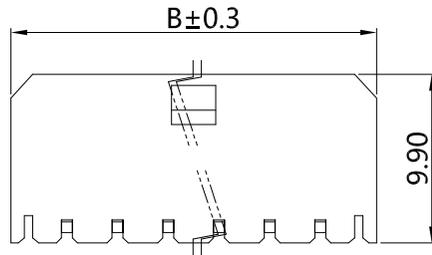



1	2	3	4	6	7	8
日期	版本	变更内容	变更人	审核		


SPECIFICATIONS

Current Rating: 5A AC DC
 Voltage Rating: 250V AC DC
 Insulator Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Operation Temperature: -25~+85°C
 Withstanding Voltage: 1500V AC/minute
 MATERIAL: PA66 15%G/F UL 94V-0 Black
 Pin Material: Brass/ Tin-plated

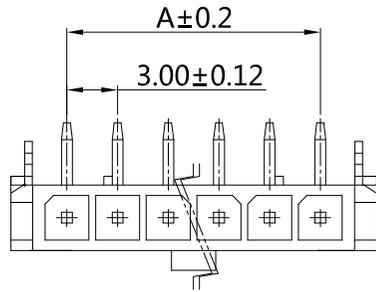

Circuits:	Dimensions	
	A	B
02	3.00	7.30
03	6.00	10.30
04	9.00	13.30
05	12.00	16.30
06	15.00	19.30
07	18.00	22.30
08	21.00	25.30
09	24.00	28.30
10	27.00	31.30
11	30.00	34.30
12	33.00	37.30

Recommended P.C. Board SMD Layout

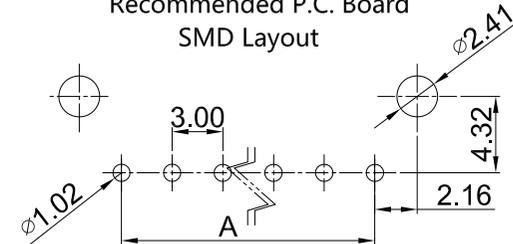

WF30MV-1XX R0 BK X 000 X

1 2 3 4 5 6 7

(RoHS Compliant)

- | | | | |
|----------------------------------|-----------------------|---|----------------------|
| 1. Insulator material:
V=PA66 | 4. Color:
BK=Black | 5. Contact Plated:
T=Matte Tin over Nickel | 6.Special Options |
| 2. Circuits: 2-12PIN | | | 7. Packing:
A=Bag |
| 3. Taill Style:
R0=90 | | | |



东莞市震升电子有限公司
DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM 1:
2:
3:

TEL:0769-85305015 FAX:0769-85845060

PART NO.	WF30MV-1XXR0BKX000X	.X ±0.25	.XX ±0.20	.XXX ±0.1
DRAWING NO	ZS-20023-W	EDITION:A0		ITEM: WF3.0
DRAWN BY	Deng Jin Quan	2024-3-25		SCALE:1:1
APPROVAL BY	Chen xiao guang	2024-3-25		UNIT:M.M