





| | | | | | | | |
|----|----|------|-----|----|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 日期 | 版本 | 变更内容 | 变更人 | 审核 | | | |

SPECIFICATIONS



Current Rating: 5A AC DC
Voltage Rating: 250V AC DC
Insulator Resistance: 1000MΩ min
Contact Resistance: 20MΩ max
Operation Temperature: -25~+85°C
Withstanding Voltage: 1500V AC/minute
MATERIAL: PA66 15%G/F UL 94V-0 Black
Pin Material: Brass/ Tin-plated

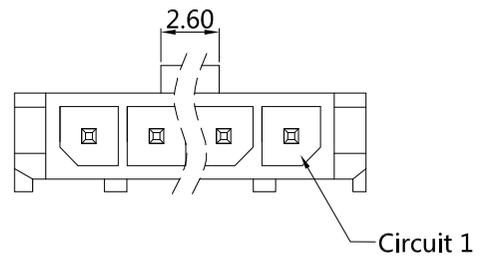


| Circuits: | Dimensions | |
|-----------|------------|-------|
| | A | B |
| 02 | 3.00 | 9.65 |
| 03 | 6.00 | 12.65 |
| 04 | 9.00 | 15.65 |
| 05 | 12.00 | 18.65 |
| 06 | 15.00 | 21.65 |
| 07 | 18.00 | 24.65 |
| 08 | 21.00 | 27.65 |
| 09 | 24.00 | 30.65 |
| 10 | 27.00 | 33.65 |
| 11 | 30.00 | 36.65 |
| 12 | 33.00 | 39.65 |

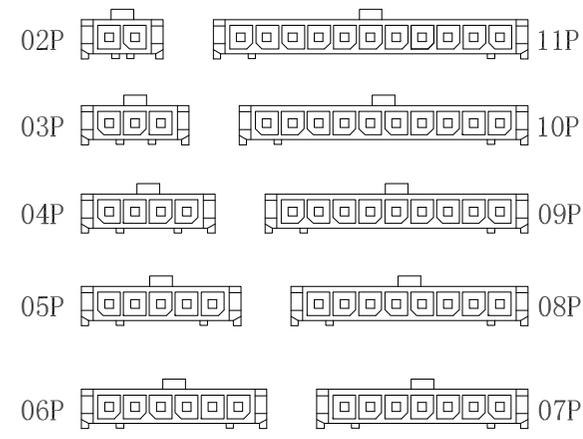

CIRCUIT SIZE LAYOUT

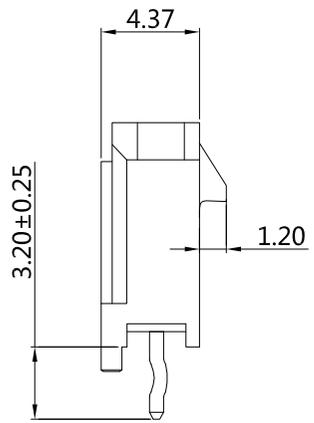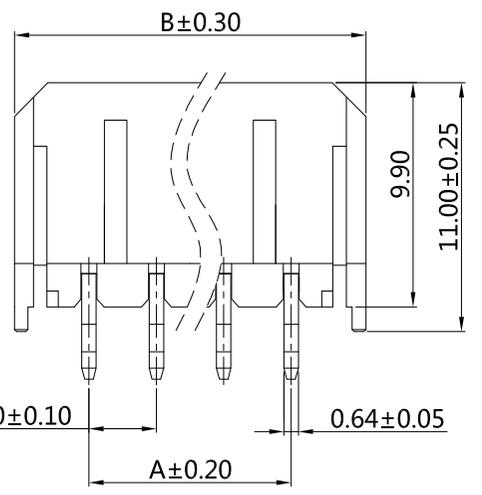

Recommended P.C. Board SMD Layout

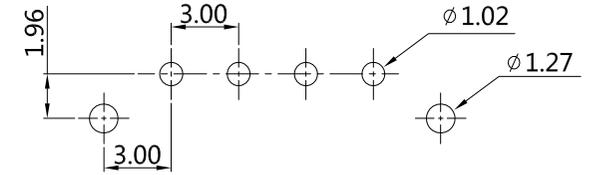

WF30MV-1XX SK BK X 000 X
1 2 3 4 5 6 7

(RoHS Compliant)

- 1. Insulator material: V=PA66
- 2. Circuits: 2-12PIN
- 3. Taill Style: SK=180°打K
- 4. Color: BK=Black
- 5. Contact Plated: T=Matte Tin over Nickel
- 6.Special Options
- 7. Packing: A=Bag

| | | | | | | | | |
|-----|-------------------------------------|----------|---------------------|-----------------|------------|-------------|-----------|-----------|
| BOM | 1: | PART NO. | WF30MV-1XXSKBKX000X | | | .X ±0.25 | .XX ±0.20 | .XXX ±0.1 |
| | 2: | | DRAWING NO | ZS-20022-W | EDITION:A0 | ITEM: WF3.0 | | |
| | 3: | | DRAWN BY | Deng Jin Quan | 2024-3-25 | SCALE:1:1 | | |
| | TEL:0769-85305015 FAX:0769-85845060 | | APPROVAL BY | Chen xiao guang | 2024-3-25 | UNIT:M.M | | |