
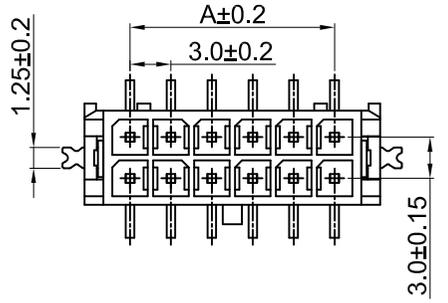

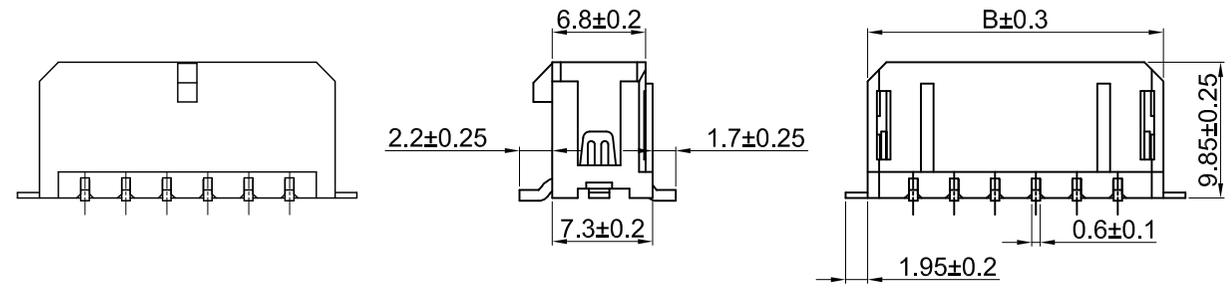


SPECIFICATIONS


Current Rating: 7A AC DC
 Voltage Rating: 250V AC DC
 Insulator Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Operation Temperature: -25~+85°C
 Withstanding Voltage: 1500V AC/minute

MATERIAL: PA66 15%G/F UL 94V-0 Black
 Pin Material: Brass/ Tin-plated

Circuits:	Dimensions	
	A	B
01	--	9.65
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

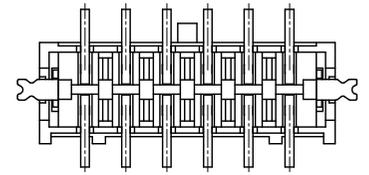

Recommended P.C. Board SMD Layout

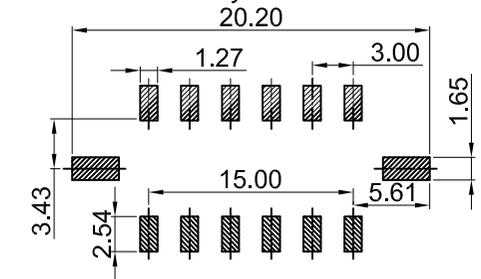

WF30MV-2XX D0 BK X 000 X
 1 2 3 4 5 6 7

(RoHS Compliant)

- | | | | |
|----------------------------------|-----------------------|---|------------------------------------|
| 1. Insulator material:
V:PA66 | 4. Color:
BK=Black | 5. Contact Plated:
T=Matte Tin over Nickel | 6.Special Options |
| 2. Circuits: 1-12PIN | | | 7. Packing:
A=Bag
E=Cap+Reel |
| 3. Taill Style:
R0=SMT | | | |

东莞市震升电子有限公司
 DONG GUAN ZHEN SHENG ELECTRONICS CO.,LTD

TEL:0769-85305015 FAX:0769-85845060

PART NO.	WF30MV-2XXD0BKX000X	.X ±0.25	.XX ±0.20	.XXX ±0.1
BOM 1:	DRAWING NO	ZS-20027-W	EDITION:A0	ITEM: WF3.0
BOM 2:	DRAWN BY	Deng Jin Quan	2024-3-25	SCALE:1:1
BOM 3:	APPROVAL BY	Chen xiao guang	2024-3-25	UNIT:M.M