





日期	版本	变更内容	变更人	审核
----	----	------	-----	----

SPECIFICATIONS

Current Rating: 5A AC DC
 Voltage Rating: 250V AC DC
 Insulator Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Operation Temperature: -25~+85°C
 Withstanding Voltage: 1500V AC/minute

MATERIAL: PA66 15%G/F UL 94V-0 Black
 Pin Material: Brass/ Tin-plated

Circuits:	Dimensions	
	A	B
01	--	9.65
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

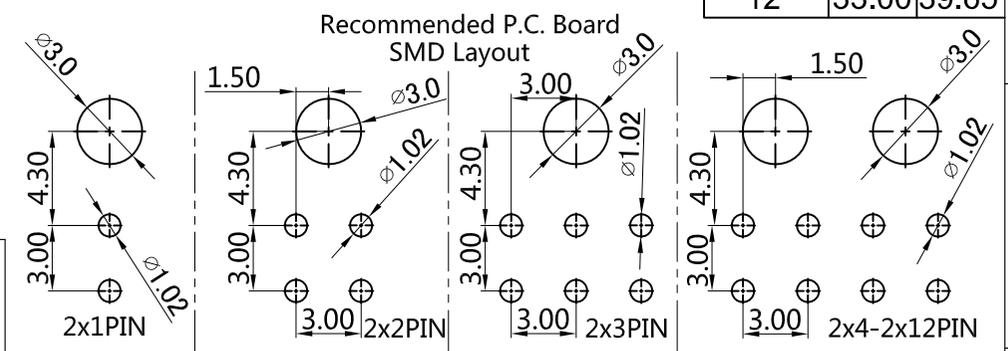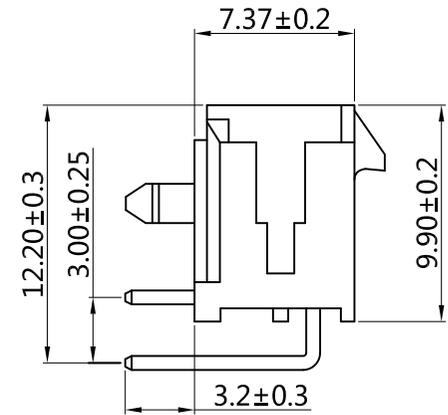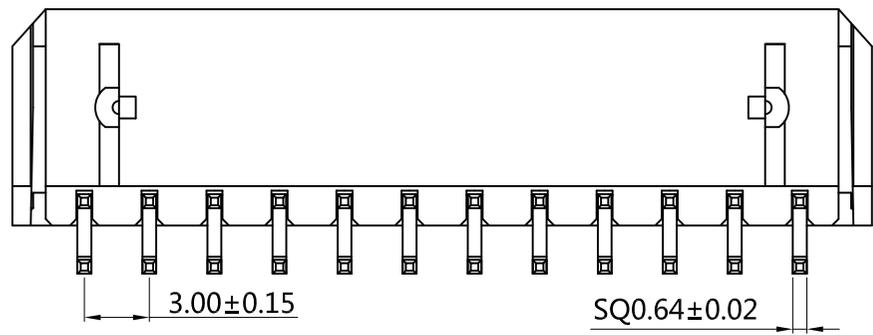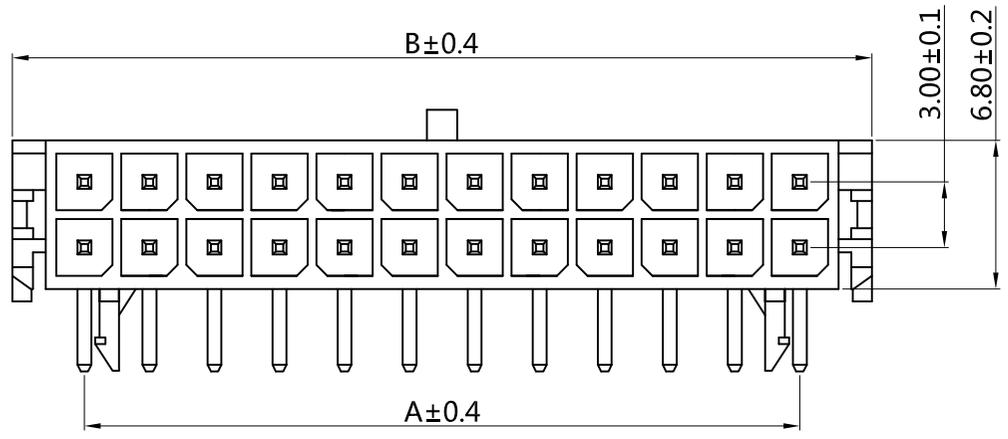

WF30MV-2XX R0 BK X 000 X
 1 2 3 4 5 6 7

(RoHS Compliant)

- 1. Insulator material: V:PA66
- 2. Circuits: 1-12PIN
- 3. Taill Style: R0=90°
- 4. Color: BK=Black
- 5. Contact Plated: T=Matte Tin over Nickel
- 6.Special Options
- 7. Packing: A=Bag



BOM 1: 2: 3:	PART NO.	WF30MV-2XXR0BKX000X	.X ±0.25	.XX ±0.20	.XXX ±0.1
	DRAWING NO	ZS-20026-W	EDITION:A0	ITEM: WF3.0	
	DRAWN BY	Deng Jin Quan	2024-3-25	SCALE:1:1	
	APPROVAL BY	Chen xiao guang	2024-3-25	UNIT:M.M	